


# Roofing Solutions

## UNDERLAYMENT COLLECTION



# Our Product Line

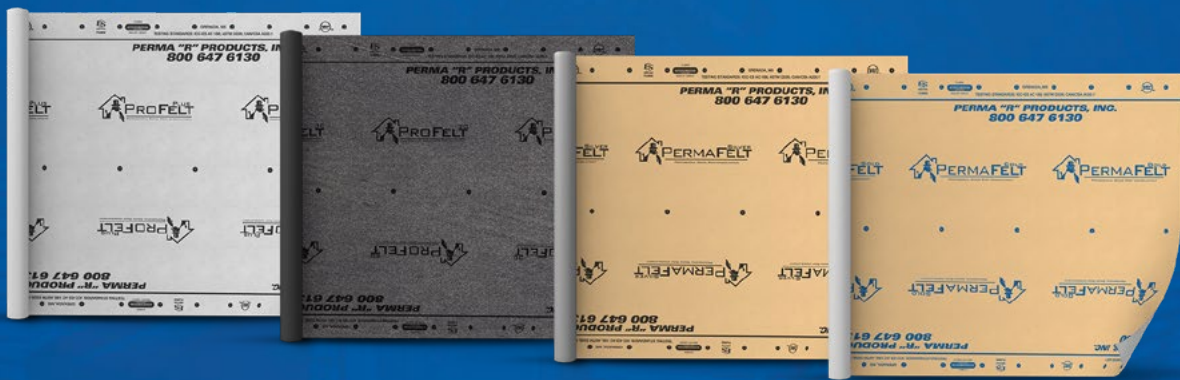

**PROFELT<sup>PLUS</sup>**  
PROFESSIONAL GRADE ROOF UNDERLAYMENT

**High quality performance comes from a high quality product.**

At Perma "R" Products, our goal is to provide "best in class" products. We stand apart from other roof underlayment manufacturers with our quality roof underlayments and exceptional service.



**PROFELT<sup>3D</sup>**  
PROFESSIONAL GRADE ROOF UNDERLAYMENT

## Know what's under your roof.

With our selection of synthetic underlayments, we have the right product for the right roof covering. Our underlayments are designed to replace, and outperform traditional asphalt felts. Whether you choose ProFeltPlus™ for under asphalt shingles or PermaFeltGold™ for under slate roofing, you can rest easy knowing you have the right product for the job no matter what final roof covering is used.



**PERMAFELT<sup>SILVER</sup>**  
PROFESSIONAL GRADE ROOF UNDERLAYMENT

Each of our felts are a bit different, but no matter which one you choose, know you're getting a high-quality product that will not rot, dry out, nor support mold growth. These are all key factors that go into putting a roof on. Unlike traditional asphalt felts, Perma "R" Products underlayments will not break down when exposed to UV rays. As a bonus, all of our roofing underlayments are 100% recyclable.



**PERMAFELT<sup>GOLD</sup>**  
PROFESSIONAL GRADE ROOF UNDERLAYMENT

Perma "R" Products roofing felts offer rugged strength and durability on the job site meaning you can say good bye to blow offs and tears. After being installed, walking around on your roofing project should not be a hazard to your health. Our premium series felts have a proprietary embossed slip-resistant coating and our pro series felts have a non-woven fabric laminated to the top side to aid in better traction.\*

Choose quality every time.

**With Perma "R" Products... We've Got You Covered.**

\*All roof underlayments may be slippery when wet or covered with mud, dust, frost, ice or snow. Always follow OSHA fall protection guidelines and use caution.

# What's under your roof?

Comparison Chart	<b>PROFELT<sup>PLUS</sup></b> PROFESSIONAL GRADE ROOF UNDERLAYMENT	<b>PROFELT<sup>30</sup></b> PROFESSIONAL GRADE ROOF UNDERLAYMENT	<b>PERMAFELT<sup>SILVER</sup></b> PROFESSIONAL GRADE ROOF UNDERLAYMENT	<b>PERMAFELT<sup>GOLD</sup></b> PROFESSIONAL GRADE ROOF UNDERLAYMENT
<b>Replaces</b>	#15 Asphalt Felt	#30 Asphalt Felt	Asphalt Felt	Asphalt Felt
<b>Size</b>	3.2 oz/yd <sup>2</sup>	3.8 oz/yd <sup>2</sup>	3.9 oz/yd <sup>2</sup>	4.3 oz/yd <sup>2</sup>
<b>Meets &amp; Exceeds ASTM D226</b>	✓	✓	✓	✓
<b>Material</b>	Non-woven fibrous laminated for better traction	Non-woven fibrous laminated for better traction	Proprietary rubberized coating for better traction	Proprietary rubberized coating for better traction
<b>UV Protected</b>	180 days	180 days	180 days	180 days
<b>Stronger than #30 Felt</b>	11x	20x	15x	22x
<b>Does Not Promote Mold Growth</b>	✓	✓	✓	✓
<b>Class A Fire</b>	✓	✓	✓	✓
<b>Low Temp Flexibility</b>	✓	✓	✓	✓
<b>Recyclable</b>	✓	✓	✓	✓
<b>For Use Under</b>	Asphalt and Synthetic Shingle	Metal, Shake, and Shingle	Metal, Shake, Tile, Slate, and Shingle	Premium Metal, Shake, Tile, Slate, and Shingle
<b>Code Listing</b>	CCRR-1116	CCRR-1053	CCRR-1053	CCRR-1053



Affix double sided tape here

## PROFELT<sup>PLUS</sup>

PROFESSIONAL GRADE ROOF UNDERLAYMENT



Product Specifications		Test Method
<b>Basis Weight / Roll Weight</b>	3.0 oz/yd <sup>2</sup> (+/-5%) / 2.3 lbs/square	
<b>Tensile Strength</b>	MD 106 lb CD 108 lb	ASTM D5034
<b>Tear Strength</b>	MD 30 lb CD 30 lb	ASTM D4533
<b>Elongation</b>	MD 18% CD 15%	ASTM D5035
<b>Water Transmission</b>	PASS	ASTM D4869
<b>Water Ponding</b>	PASS	AC48 Sec. 4.4
<b>UV Weathering</b>	45 Days	
<b>Class A Fire Resistance</b>	ASTM E108	

Affix double sided tape here

## PROFELT<sup>30</sup>

PROFESSIONAL GRADE ROOF UNDERLAYMENT



Product Specifications		Test Method
<b>Basis Weight / Roll Weight</b>	3.8 oz/yd <sup>2</sup> (+/-5%) / 2.3 lbs/square	
<b>Tensile Strength</b>	MD 100 lb CD 80 lb	ASTM D5034
<b>Tear Strength</b>	MD 42 lb CD 40 lb	ASTM D4533
<b>Elongation</b>	MD 17% CD 18%	ASTM D751
<b>Water Transmission</b>	PASS	ASTM D4869
<b>Water Ponding</b>	PASS	AC48 Sec. 4.4
<b>UV Weathering</b>	90 Days	
<b>Class A Fire Resistance</b>	ASTM E108, UL 790, UBC 15-2	

Affix double sided tape here

## PERMAFELT<sup>SILVER</sup>

PROFESSIONAL GRADE ROOF UNDERLAYMENT



Product Specifications		Test Method
<b>Basis Weight / Roll Weight</b>	3.9 oz/yd <sup>2</sup> (+/-5%) / 2.8 lbs/square	
<b>Tensile Strength</b>	MD 94 lb CD 93 lb	ASTM D5034
<b>Tear Strength</b>	MD 33 lb CD 30 lb	ASTM D4533
<b>Pliability</b>	PASS	AC48 Sec. 4.3
<b>Water Transmission</b>	PASS	ASTM D4869
<b>Water Ponding</b>	PASS	AC48 Sec. 4.4
<b>UV Weathering</b>	180 Days	
<b>Class A Fire Resistance</b>	ASTM E108, UL 790, UBC 15-2	

Affix double sided tape here

## PERMAFELT<sup>GOLD</sup>

PROFESSIONAL GRADE ROOF UNDERLAYMENT



Product Specifications		Test Method
<b>Basis Weight / Roll Weight</b>	4.3 oz/yd <sup>2</sup> (+/-5%) / 3 lbs/square	
<b>Tensile Strength</b>	MD 120 lb CD 112 lb	ASTM D5034
<b>Tear Strength</b>	MD 52 lb CD 43 lb	ASTM D4533
<b>Fastener Seal Ability</b>	PASS	ASTM D1970-1
<b>Water Transmission</b>	PASS	ASTM D4869
<b>Water Ponding</b>	PASS	AC48 Sec. 4.4
<b>UV Weathering</b>	180 Days	
<b>Class A Fire Resistance</b>	ASTM E108, UL 790, UBC 15-2	